



ATV/UTV WINCH

With complete line of ATV/UTV winch, COMEUP winch are always the best choice of rider who need help to get rid of trouble in mud or move a heavy load. ATV & UTV winch are designed with perfect, endurance and reliability coming with features like reliable three-stage planetary gears, center drum design, weather-sealed contactor, mechanical load holding, easy-to-use handlebar rocker switch design. If you look for a powerful ATV/UTV winch, we are confident they are what you wanted.

- Power in and power out
- Winch drum centred avoids the interference of rope and provides streamlined appearance
- Mechanical load holding and dynamic brake for 100% braking
- High efficiency, low amp. draw and sealed permanent magnet motor
- Full metal 3 stage planetary gear train for greater pulling force
- Weather sealed contactor gives better water proof and lower amp. draw

- *ATV WINCH*
- *UTV WINCH*



Cub Series



1. High efficient, low amp. draw and sealed permanent magnet motor



2. Winch drum centered avoids tire interference of rope and provides streamlined appearance



3. Mechanical load holding and dynamic brake for 100% braking



4. Sliding pin and ring gear clutch device for rapid wire rope payout



5. Full metal 3 stage planetary gear train for greater pulling force



6. Weather sealed contactor gives better water proof and lower amp. draw



ATV-1500 ATV Winch

- Rated Line Pull: 680 kg / 1,500 lb
- Part Number: PN 122391
- Cam activated clutch (freespooling) for fast wire rope payout




SPECIFICATIONS

Model Number	ATV -1500
Maximum line pull	680 kg / 1,500 lb
Motor	300 w / 0.4 hp
Gear train	3-stage planetary gears
Gear ratio	103:1
Clutch (freespooling)	Cam activated
Brake	Mechanical & dynamic
Control	Handlebar trigger switch
Rope size (mm x m)	4 x 15.2 (5/32" x 50')
Rope type	Galvanized aircraft A7 x 19
Winch construction	Aluminum die cast drum and strong steel housings
Drum size (mm x mm)	38 x 75 (1.5" x 3")
Mounting bolts pattern (mm x mm)	76 x 124 (3" x 4.9")
Winch weight (including wire rope)	5.2 kg / 11.5 lb
Gross weight	10 kg / 22 lb
Box dimension, mm (L x D x H)	296 x 223 x 140 (11.7" x 8.8" x 5.5")

PERFORMANCE DATA

Performance 12V DC (1st layer of wire rope on the drum)			Line Pull and Rope Capacity		
Model Number	ATV-1500		Model Number	ATV-1500	
Line Pull kg / lb	Line Speed mpm / fpm	Line Speed mpm / fpm	Layer of Wire Rope	Pull by Layer kg / lb	Total Rope on the Drum m / ft
No Load	4.6 / 15.1	10	1 st	680 / 1,500	2.4 / 7.9
227 / 500	3.3 / 10.8	30	2 nd	572 / 1,260	5.3 / 17.3
454 / 1,000	2.1 / 6.9	60	3 rd	493 / 1,086	8.6 / 28.2
680 / 1,500	1.5 / 4.9	100	4 th	433 / 955	12.4 / 40.6
			5 th	386 / 851	15.2 / 50

DIMENSION mm/in

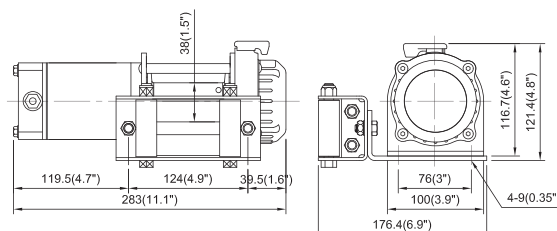

ATV Winch

COMEUP ATV series winches are designed for passionate rider who loves challenge of tackling a tough hill climb, navigating a monstrous boulder field and deepest mud. Now, just eye it, try it enjoys for unlimited and safe experience.



Cub 3 ATV Winch

- Rated Line Pull: **1,361 kg / 3,000 lb**
- Part Number: **PN 123561**

Cub 3s ATV Winch


- Rated Line Pull: **1,361 kg / 3,000 lb**
- Part Number: **PN 129300**
- It comes with 15.2 m (50 ft) of 4.8 mm (3/16") synthetic rope and hawse fairlead




SPECIFICATIONS

Model Number	Cub 3	Cub 3s
Maximum line pull	1,361 kg / 3,000 lb	
Motor	800 w / 1.0 hp	
Gear train	3-stage planetary gears	
Gear ratio	138.5:1	
Clutch (freespooling)	Sliding pin and ring gear	
Brake	Mechanical & dynamic	
Control	Handlebar rocker switch	
Rope size (mm x m)	4.8 x 15.2 (3/16" x 50')	
Rope type	Galvanized aircraft A7 x 19	Synthetic SK-75
Winch construction	Aluminum die cast housings and drum	
Rotation of winch	Rope shall be under-wound orientation only	
Drum size (mm x mm)	55 x 75 (2.2" x 3")	
Mounting bolts pattern (mm x mm)	76 x 124 (3" x 4.9")	
Winch weight (including rope)	8.2 kg / 18 lb	7.2 kg / 15.9lb
Gross weight	12.5 kg / 27.6 lb	11.5 kg / 25.3 lb
Box dimension, mm (L x D x H)	349 x 331 x 144 (13.7" x 13" x 5.7")	349 x 331 x 144 (13.7" x 13" x 5.7")

DIMENSION mm/in (Cub 3)

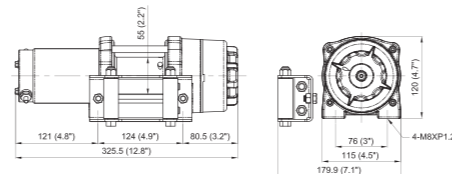

DIMENSION mm/in (Cub 3s)

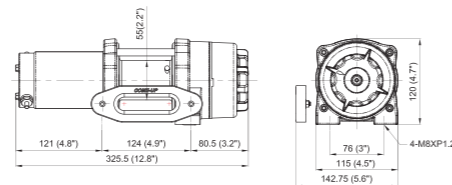

UTV Winch

Are you the person who operate vehicle on the job or field for stronger and durable experience? Stop being dubious, just experience inherent endurance and speed of "Comeup" UTV Winch, you will be satisfied with its outstanding performance and no substitute.



Cub 4 UTV Winch

- Rated Line Pull: **1,814 kg / 4,000 lb**
- Part Number: **PN 123920**

Cub 4s UTV Winch


- Rated Line Pull: **1,814 kg / 4,000 lb**
- Part Number: **PN 129410**
- It comes with 15.2 m (50 ft) of 5.5 mm (7/32") synthetic rope and hawse fairlead




SPECIFICATIONS

Model Number	Cub 4	Cub 4s
Maximum line pull	1,814 kg / 4,000 lb	
Motor	800 w / 1.0 hp	
Gear train	3-stage planetary gears	
Gear ratio	191:1	
Clutch (freespooling)	Sliding pin and ring gear	
Brake	Mechanical & dynamic	
Control	Handlebar rocker switch	
Rope size (mm x m)	5.5 x 15.2 (7/32" x 50')	
Rope type	Galvanized aircraft A7 x 19	Synthetic SK-75
Winch construction	Aluminum die cast housings and drum	
Rotation of winch	Rope shall be under-wound orientation only	
Drum size (mm x mm)	55 x 119 (2.2" x 4.7")	
Mounting bolts pattern (mm x mm)	76 x 168 (3" x 6.6")	
Winch weight (including rope)	8.9 kg / 19.6 lb	8 kg / 17.6 lb
Gross weight	13.1 kg / 28.9 lb	12 kg / 26.4 lb
Box dimension, mm (L x D x H)	380 x 362 x 144 (15" x 14.3" x 5.7")	380 x 362 x 144 (15" x 14.3" x 5.7")

DIMENSION mm/in (Cub 4)

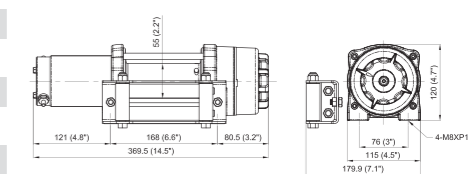

DIMENSION mm/in (Cub 4s)

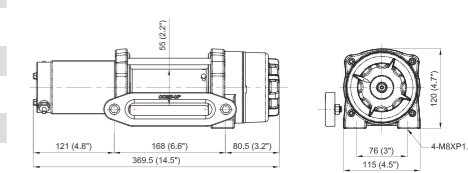

PERFORMANCE DATA

Performance 12V DC (1st layer of rope on the drum)			Line Pull and Rope Capacity		
Model Number	Cub 3 / 3s		Model Number	Cub 3 / 3s	
Line Pull kg / lb	Line Speed mpm / fpm	Amp. Draw A	Layer of Rope	Pull by Layer kg / lb	Total Rope on the Drum m / ft
No Load	6.8 / 22.2	20	1 st	1,361 / 3,000	2.8 / 9.3
227 / 500	5.7 / 18.7	45	2 nd	1,173 / 2,585	6.1 / 20.1
454 / 1,000	4.8 / 15.6	75	3 rd	1,030 / 2,271	9.9 / 32.5
680 / 1,500	3.8 / 12.5	105	4 th	918 / 2,025	14.1 / 46.3
907 / 2,000	3.0 / 9.8	140	5 th	829 / 1,827	15.2 / 50
1,134 / 2,500	2.5 / 8.0	180			
1,361 / 3,000	2.0 / 6.7	230			

Accessories



- Remote Control (Option)
- Winch
- Remote Socket (Option)
- contactor
- Rocker Switch

PERFORMANCE DATA

Performance 12V DC (1st layer of rope on the drum)			Line Pull and Rope Capacity		
Model Number	Cub 4 / 4s		Model Number	Cub 4 / 4s	
Line Pull kg / lb	Line Speed mpm / fpm	Amp. Draw A	Layer of Rope	Pull by Layer kg / lb	Total Rope on the Drum m / ft
No Load	6.0 / 19.7	20	1 st	1,814 / 4,000	4.0 / 13.2
227 / 500	3.9 / 12.8	45	2 nd	1,535 / 3,385	8.8 / 28.8
454 / 1,000	3.4 / 11.2	70	3 rd	1,331 / 2,933	14.2 / 46.7
680 / 1,500	3.1 / 10.2	90	4 th	1,174 / 2,588	15.2 / 50
907 / 2,000	2.9 / 9.5	120			
1,134 / 2,500	2.7 / 8.9	150			
1,361 / 3,000	2.4 / 7.9	180			
1,588 / 3,500	2.2 / 7.2	210			
1,814 / 4,000	2.0 / 6.6	230			

Wireless Remote Control

PN 881286
2.4 GHz within 27 m (90') for Cub 3/3s/4/4s



Roller Fairlead

PN 880231 65 mm throat for ATV-1500, Cub 3
PN 880132 109 mm throat for Cub 4



PN 880231



PN 880132

Remote Control

PN 881289 for Cub 3/3s/4/4s

Contactors

PN 881056
200A, 12V for ATV-1500, Cub 3/3s/4/4s



Contactors Pack

PN 881037 Detachable contactor pack for Cub 3/3s/4/4s
PN 881039 Detachable contactor pack for ATV-1500

Handlebar Switch Kit

PN 880261 trigger switch with cord for ATV-1500
PN 881003 rocker switch with cord for Cub 3/3s/4/4s



PN 880261



PN 881003

Snatch Block

PN 881080 Max load 5,000 kg / 11,000 lb for Cub 4/4s
PN 881081 Max load 2,700 kg / 6,000 lb for ATV-1500, Cub 3/3s



PN 881080



PN 881081

Wire Rope with Hook

PN 880230 4.8 mm X 15.2 m w/stopper for Cub 3
PN 880257 4 mm X 15.2 m w/stopper for ATV-1500
PN 880268 5.5 mm X 15.2 m w/stopper for Cub 4



Hawse Fairlead

PN 881071 82 mm throat for ATV-1500, Cub 3s
PN 881072 126 mm throat for Cub 4s



Synthetic Rope w/Hook

PN 881063 SK-75, 4.8 mm X 15.2 m for Cub 3s
PN 881064 SK-75, 5.5 mm X 15.2 m for Cub 4s
PN 881065 SK-75, 4 mm X 15.2 m for ATV-1500



Base Plate Kit

Part Number	Applicable ATV Model
PN 880232	For ATV-1500, Cub 3/3s winch
PN 880269	For Cub 4/4s winch
PN 881015	Honda 2000-2004 Foreman Rubicon 4x4 (TRX500FA) Honda 2003-2006 Rincon 4x4 (TRX650FA) Honda 2006-2008 Rincon 4x4 (TRX680FA)
PN 881016	Honda Mid 2004-2006 Sportsman 400 4x4 Honda 2006-2007 Sportsman 450 4x4 Honda Mid 2004-2007 Sportsman 500 H.O. 4x4 Honda Mid 2004-2005 Sportsman 600 Twin 4x4 Honda Mid 2004-2007 Sportsman 700 Twin 4x4 Honda 2005-2007 Sportsman 800 Twin EFI 4x4 Honda 2006-2007 Sportsman X2 500 EFI 4x4
PN 881017	Honda 1995-2003 Foreman (TRX400FW) Honda 1998-2001 Foreman ES (TRX450ES) Honda 2002-2004 Foreman ES (TRX450FE) Honda 1998-2001 Foreman S (TRX450S) Honda 2003-2004 Foreman S (TRX450FM)
PN 881018	Honda 2005-2006 Foreman 2x4 (TRX500TM) Honda 2005-2006 Foreman 4x4 (TRX500FM) Honda 2005-2006 Foreman ES 4x4 (TRX500FE) Honda 2005-2006 Foreman Rubicon 4x4 (TRX500FG) Honda 2005-2006 Foreman Rubicon 4x4 (TRX500FG)
PN 881019	Honda 2004-2008 Foreman 2x4 (TRX500TM) Honda 2007-2008 Foreman 4x4 (TRX500FM) Honda 2007-2007 Foreman ES 4x4 (TRX500FE) Honda 2008-2008 Foreman ES 4x4 (TRX500FPE) Honda 2007-2008 Foreman Rubicon 4x4 (TRX500FA) Honda 2007-2008 Foreman Rubicon 4x4 (TRX500FG)
PN 881020	Honda ATV HONDA 420 Honda Ramsey 2500 vinssille
PN 881021	Bombardier 2009 400 Outlander EFI 4x4 Bombardier 2007 400 Outlander H.O. 4x4 Bombardier 2009 400 Outlander Max EFI 4x4 Bombardier 2008 500 Outlander Max EFI 4x4 Bombardier 2008 500 Outlander Max EFI 4x4 Bombardier 2006 650 Outlander Max HO 4x4 Bombardier 2007 650 Outlander V-Twin HO EFI 4x4 Bombardier 2006 800 Outlander Max 4x4 Bombardier 2007-2008 800 Outlander V-Twin HO EFI 4x4 Bombardier 2009 800R Outlander EFI 4x4 Bombardier 2009 800R Outlander Max EFI 4x4
PN 881022	Yamaha 2002-2005 YFM 660 FP Grizzly 4x4 Yamaha 2006 YFM 660 FP Grizzly 4x4 Yamaha 2007 YFM 660 FP Grizzly 4x4 Yamaha 2008 YFM 660 FP Grizzly 4x4
PN 881023	Yamaha 2009 YFM 550 Grizzly FI Auto 4x4 Yamaha 2009 YFM 550 Grizzly FI Auto 4x4 w/PS Yamaha 2009 YFM 550 Grizzly FI SE Auto 4x4 w/PS Yamaha 2007 YFM 700 Grizzly FI Auto 4x4 Yamaha 2008-2009 YFM 700 Grizzly FI Auto 4x4 Yamaha 2008-2009 YFM 700 Grizzly FI Auto 4x4 w/PS Yamaha 2009 YFM 700 Grizzly FI Auto 4x4 w/PS DU Yamaha 2008-2009 YFM 700 Grizzly FI Auto 4x4 w/PS SE
PN 881024	Suzuki 2008-2009 450 King Quad AXi 4x4 EFI Suzuki 2005-2006 700 King Quad 4x4 Suzuki 2007 700 King Quad 4x4 EFI Suzuki 2008-2009 750 King Quad AXi 4x4 EFI Suzuki 2007 LT King Quad 450 4x4 EFI
PN 881025	Honda 2006 Rincon TRX680FG/GPScape Honda 2003-2005 Rincon 650/GPScape

ATV/UTV Winch Accessories Chart

Model Number	ATV-1500	Cub 3	Cub 3s	Cub 4	Cub 4s
Line pull	680 kg / 1,500 lb	1,361 kg / 3,000 lb	1,361 kg / 3,000 lb	1,814 kg / 4,000 lb	1,814 kg / 4,000 lb
Handlebar switch kit	●	●	●	●	●
Contactors pack	●	●	●	●	●
Roller fairlead	●	●	-	●	-
Hawse fairlead	◎	-	●	-	●
Wire rope w/hook	●	●	-	●	-
Synthetic rope w/hook	◎	-	●	-	●
Handlebar hardware	●	●	●	●	●
Mounting hardware	●	●	●	●	●
Base plate kit	●	◎	◎	◎	◎
Wireless remote control	◎	◎	◎	◎	◎
Remote control	-	◎	◎	◎	◎
Snatch block	◎	◎	◎	◎	◎

● Means as a standard accessory / ◎ Means as an option accessory